

Pitched roof - sdmhzi02a-04

pitched roof, solid wood construction, ventilated, with dry lining, not suspended, other surface

Performance rating

Fire protection performance REI 60

maximum span = 5 m; maximum load $E_{d,fi} = 5 \text{ kN/m}^2$ (without roof structure)
 Classified by HFA

Germany

REI60

Load $E_{d,fi}$ according to the German certification document

Corresponding proof: manufacturer-specific



Thermal performance U Diffusion 0.13 $\text{W}/(\text{m}^2\text{K})$ suitable

Calculated by TUM

Acoustic performance $R_w (C; C_{tr})$ 46(-1;-7) dB
 $L_{n,w} (C_i)$

Assessed by Müller-BBM

Mass per unit area m 162.00 kg/m^2

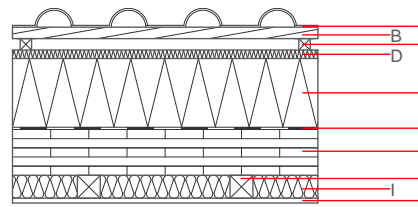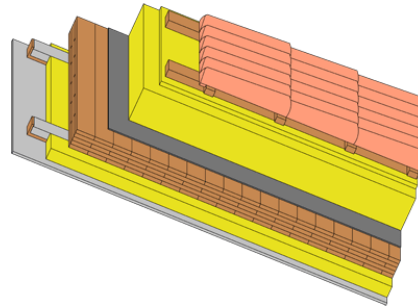

Note: The design of the under-roof construction and of the counter-battens have to be specified according to the roof pitch and the national requirements.

Underlay laminated on insulation board

Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

	Thickness	Building material	Thermal performance				Reaction to fire EN
			λ	$\mu \text{ min} - \text{max}$	ρ	c	
A		concrete roof tile /tiled roof				2100	A1
B	30.0	spruce wood battens (30/50)	0.120	50	450	1.600	D
C	30.0	spruce wood counter battens (Germany 30mm); Austria: minimum 50mm	0.120	50	450	1.600	D
D		sarking membrane $s_d \leq 0,3\text{m}$				1000	E
E	200.0	mineral wool [040; 130] on-roof insulation	0.040	1	130	1.030	
F	0.2	sealing sheet (air tight)					
G	120.0	cross laminated timber	0.130	50	500	1.600	D
H	60.0	spruce wood battens (60/60; e=400)	0.120	50	450	1.600	D
I	60.0	mineral wool [040; 11; <1000°C]	0.040	1	11	1.030	A1
J	12.5	gypsum plaster board type DF	0.250	10	800	1.050	A2

Sustainability rating (per m^2)

Database ecoinvent

OI_{kon} 95.7

Calculated by HFA

Database GaBi (ÖKOBAUDAT)

Built-in renewable materials kg 66.520
Biogenic carbon in $\text{kg CO}_2\text{-e}$. kg $\text{CO}_2\text{-e}$ 95.930
Energy use of Primary Energy MJ 1426.590
Share of renewable PE % 23.20

Calculated by TUM

Details of sustainability rating

Database ecoinvent

Lifecycle (Phases)	GWP [kg CO ₂ -e.]	AP [kg SO ₂ -e.]	EP [kg PO ₄ -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.454	0.149	5,27E-6	0.173	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	80.991	958.764	1039.756	1117.655	33.300	1150.955

Database GaBi (ÖKOBAUDAT)

Lifecycle (Phases)	GWP [kg CO ₂ -e.]	AP [kg SO ₂ -e.]	EP [kg PO ₄ -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.323	0.049	4,23E-6	0.031	
C1 - C4		0.011	0.010	1,91E-7	0.002	
A1 - C4		0.338	0.060	4,43E-6	0.032	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	327.524	1139.465	1464.107	1043.713	55.144	1098.187
C1 - C4	2.422	-1129.448	-1127.025	36.008	0.000	36.008
A1 - C4	331.033	10.276	338.427	1095.557	55.196	1150.082