

Pitched roof - sdmhzi03a-00

pitched roof, solid wood construction, ventilated, with dry lining, not suspended, other surface

Performance rating

Fire protection performance REI 60

maximum span = 5 m; maximum load $E_{d,fi} = 5 \text{ kN/m}^2$ (without roof structure)
 Classified by HFA

Germany

REI60

Load $E_{d,fi}$ according to the German certification document

Corresponding proof: manufacturer-specific



Thermal performance U Diffusion 0.15 $\text{W}/(\text{m}^2\text{K})$ suitable

Calculated by TUM

Acoustic performance R_w ($C; C_{tr}$) 52(-1;-7) dB
 $L_{n,w}$ (C_i)

Assessed by Müller-BBM

Mass per unit area m 152.20 kg/m^2

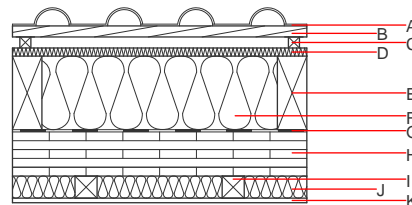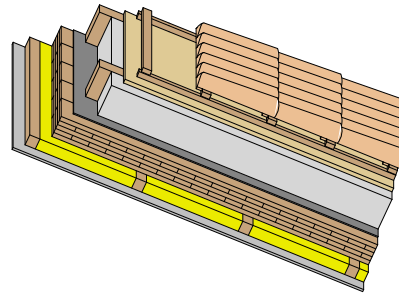

Note: The design of the under-roof construction and of the counter-battens have to be specified according to the roof pitch and the national requirements.

Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

Layer	Thickness	Building material	Thermal performance				Reaction to fire EN
			λ	μ min - max	ρ	c	
A		concrete roof tile /tiled roof				2100	A1
B	30.0	spruce wood battens (30/50)	0.120	50	450	1.600	D
C	30.0	spruce wood counter battens (Germany 30mm); Austria: minimum 50mm	0.120	50	450	1.600	D
D	22.0	softboard [045; 250] - rigid underlay	0.045	5	250	2.100	E
E	180.0	construction timber (80/...; e=800)	0.120	50	450	1.600	D
F	180.0	Cellulose fibre [040; 50]	0.040	1	50	2.000	E
G	0.2	sealing sheet (air tight)					
H	120.0	cross laminated timber	0.130	50	500	1.600	D
I	60.0	spruce wood battens (60/60; e=400)	0.120	50	450	1.600	D
J	60.0	mineral wool [040; 11; <1000°C]	0.040	1	11	1.030	A1
K	12.5	gypsum plaster board type DF	0.250	10	800	1.050	A2

Sustainability rating (per m^2)

Database ecoinvent

$OI3_{Kon}$ 40.7

Calculated by HFA

Database GaBi (ÖKOBAUDAT)

Built-in renewable materials	kg	93.140
Biogenic carbon in $\text{kg CO}_2\text{-e}$.	kg CO_2	132.170
Energy use of Primary Energy	MJ	1372.030
Share of renewable PE	%	30.09

Calculated by TUM

Details of sustainability rating

Database ecoinvent

Lifecycle (Phases)	GWP [kg CO ₂ -e.]	AP [kg SO ₂ -e.]	EP [kg PO ₄ -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.216	0.093	4,31E-6	0.060	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	101.240	1277.107	1378.347	732.088	35.418	767.506

Database GaBi (ÖKOBAUDAT)

Lifecycle (Phases)	GWP [kg CO ₂ -e.]	AP [kg SO ₂ -e.]	EP [kg PO ₄ -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.157	0.031	4,85E-6	0.031	
C1 - C4		0.011	0.007	2,56E-7	0.001	
A1 - C4		0.172	0.039	5,11E-6	0.032	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	409.446	1711.405	2119.365	908.083	34.794	942.316
C1 - C4	2.339	-1577.490	-1575.151	36.411	-22.119	14.292
A1 - C4	412.864	134.173	545.551	959.170	12.726	971.336