

Pitched roof - sdrhbi02a-05

pitched roof, timber frame construction, ventilated, with dry lining, not suspended, other surface

Performance rating

Fire protection performance REI 30

maximum span = 5 m; maximum load $E_{d,fi} = 3,66 \text{ kN/m}^2$ (rafter 80/200 without roofing, full formwork, counter battens and OSB)
Classified by HFA

Germany

F30

Load $E_{d,fi}$ according to the German certification document

Corresponding proof: DIN 4102-4:2016-05, Tabelle 10.19, Zeile 1



Thermal performance U Diffusion 0.17 W/(m²K)
suitable

Calculated by TUM

Acoustic performance $R_w (C; C_{tr})$ 48(-1;-7) dB
 $L_{n,w} (C_i)$

Assessed by Müller-BBM

Mass per unit area m 71.30 kg/m²

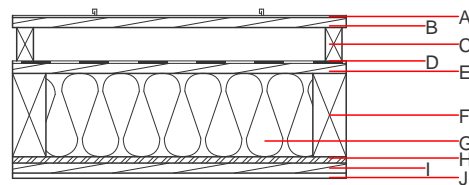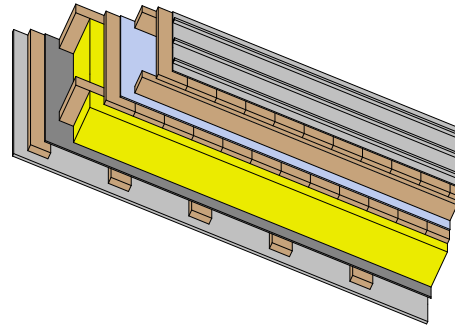

Note: The design of the under-roof construction and of the counter-battens have to be specified according to the roof pitch and the national requirements.

Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

	Thickness	Building material	Thermal performance				Reaction to fire EN
			λ	$\mu \text{ min} - \text{max}$	ρ	c	
A		sheet metal roofing on structured separation layer			7800		A1
B	24.0	spruce wood full formwork	0.120	50	450	1.600	D
C	80.0	spruce wood counter battens (40/80)	0.120	50	450	1.600	D
D		sarking membrane $s_d \leq 0,3\text{m}$			1000		E
E	24.0	planking spruce wood full formwork	0.120	50	450	1.600	D
F	240.0	construction timber (80/*; e=625)	0.120	50	450	1.600	D
G	240.0	Wood fibre insulation [039; 45]	0.039	1 - 2	45	2.100	E
H	15.0	OSB airtight	0.130	200	600	1.700	D
I	24.0	spruce wood cladding with spacing of cladding boards(24/100); a=400	0.120	50	450	1.600	D
J	12.5	gypsum plaster board type DF	0.250	10	800	1.050	A2

Sustainability rating (per m²)

Database ecoinvent

OI_{3Kon} 28.3

Calculated by HFA

Database GaBi (ÖKOBAUDAT)

Built-in renewable materials	kg	65.580
Biogenic carbon in kg CO ₂ -e.	kg CO ₂	96.300
Energy use of Primary Energy	MJ	1351.040
Share of renewable PE	%	36.60

Calculated by TUM

Details of sustainability rating

Database ecoinvent

Lifecycle (Phases)	GWP [kg CO ₂ -e.]	AP [kg SO ₂ -e.]	EP [kg PO ₄ -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.154	0.072	2,52E-6	0.036	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	160.411	1004.308	1164.719	515.584	33.975	549.559

Database GaBi (ÖKOBAUDAT)

Lifecycle (Phases)	GWP [kg CO ₂ -e.]	AP [kg SO ₂ -e.]	EP [kg PO ₄ -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.174	0.031	1,31E-6	0.040	
C1 - C4		0.002	0.000	1,33E-7	0.000	
A1 - C4		0.178	0.032	1,45E-6	0.041	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	491.998	1470.008	1965.705	823.256	116.137	939.541
C1 - C4	2.168	-1465.046	-1462.877	28.007	-43.495	-15.488
A1 - C4	494.546	5.221	503.466	856.492	72.694	929.334