
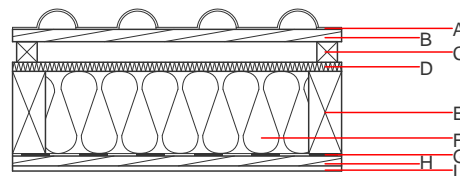


Pitched roof - sdrhzi01 a-06

pitched roof, timber frame construction, ventilated, with dry lining, not suspended, other surface

Performance rating

Fire protection performance	REI	30
maximum span = 5 m; maximum load $E_{d,fi} = 3,66 \text{ kN/m}^2$ Classified by HFA		
Thermal performance	U Diffusion	0.22 $\text{W}/(\text{m}^2\text{K})$ suitable
Calculated by HFA		
Acoustic performance	$R_w (C;C_{tr})$ $L_{n,w} (C_i)$	50(-6;-11) dB
with a tiled roof $R_w = 48 (-6; -11)$ dB Assessed by TGM		
Mass per unit area	m	31.50 kg/m^2
Calculation based on gypsum plaster board type DF		

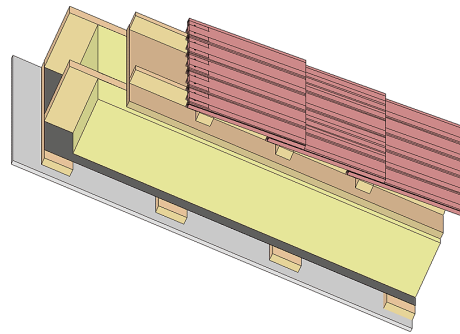

Note: The design of the under-roof construction and of the counter-battens have to be specified according to the roof pitch and the national requirements.

Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

Thickness	Building material	Thermal performance				Reaction to fire EN
		λ	$\mu \text{ min - max}$	ρ	c	
A	concrete roof tile or tiled roof				2100	A1
B 30.0	spruce wood battens (30/50)	0.120	50	450	1.600	D
C 50.0	spruce wood counter battens (minimum height 50 mm)	0.120	50	450	1.600	D
D 22.0	softboard [045; 250] - rigid underlay	0.045	5	250	2.100	E
E 200.0	construction timber (80/...; e=800)	0.120	50	450	1.600	D
F 200.0	sheep wool [0,041; R=26]	0.041	1	30	1.720	E
G	vapour barrier $s_d \geq 1 \text{ m}$				1000	
H 24.0	spruce wood cladding with spacing of cladding boards(24/100); a=400	0.120	50	450	1.600	D
I 12.5	gypsum plaster board type DF or	0.250	10	800	1.050	A2
I 12.5	gypsum fibre board	0.320	21	1000	1.100	A2

Sustainability rating (per m^2)

Database ecoinvent

$OI3_{kon}$ 20.1

Calculated by HFA

Details of sustainability rating

Database ecoinvent

Lifecycle (Phases)	GWP [kg CO ₂ -e.]	AP [kg SO ₂ -e.]	EP [kg PO ₄ -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.077	0.036	2,45E-6	0.018	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	65.791	496.732	562.522	353.505	14.060	367.565