

## Pitched roof - sdrhzi02b-04

pitched roof, timber frame construction, ventilated, with dry lining, not suspended, other surface

### Performance rating

**Fire protection performance** REI 60

maximum span = 5 m; maximum load  $E_{d,fi} = 3,66 \text{ kN/m}^2$   
 Classified by HFA

**Thermal performance** U 0.21 W/(m<sup>2</sup>K)  
 Diffusion suitable



Calculated by HFA

**Acoustic performance**  $R_w (C; C_{tr})$  51 (-2; -8) dB  
 $L_{n,w} (C_i)$

with a tiled roof  $R_w = 49 (-2; -8) \text{ dB}$   
 Assessed by TGM

**Mass per unit area** m 51.50 kg/m<sup>2</sup>

Calculation based on gypsum plaster board type DF

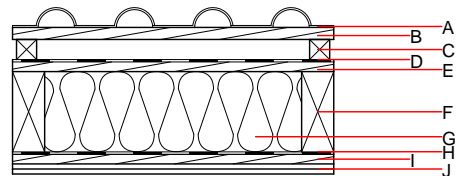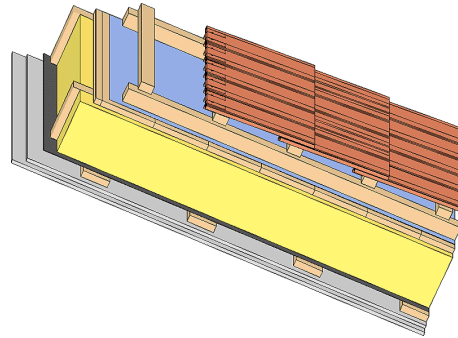

**Note:** The design of the under-roof construction and of the counter-battens have to be specified according to the roof pitch and the national requirements.

### Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

	Thickness	Building material	Thermal performance				Reaction to fire EN
			$\lambda$	$\mu \text{ min} - \text{max}$	$\rho$	c	
A		concrete roof tile or tiled roof			2100		A1
B	30.0	spruce wood battens (30/50)	0.120	50	450	1.600	D
C	50.0	spruce wood counter battens (minimum height 50 mm)	0.120	50	450	1.600	D
D		sarking membrane $s_d \leq 0,3\text{m}$			1000		E
E	24.0	spruce wood closed cladding without spacing of cladding boards	0.120	50	450	1.600	D
F	200.0	construction timber (80/...; e=800)	0.120	50	450	1.600	D
G	200.0	mineral wool [038; $\geq 33$ ; $\geq 1000^\circ\text{C}$ ]	0.038	1	33	1.030	A1
H		vapour barrier $s_d \geq 6\text{m}$			1000		
I	24.0	spruce wood cladding with spacing of cladding boards(24/100); a=400	0.120	50	450	1.600	D
J	25.0	gypsum plaster board type DF (2x12,5 mm) or	0.250	10	800	1.050	A2
J	25.0	gypsum fibre board (2x12,5 mm)	0.320	21	1000	1.100	A2

### Sustainability rating (per m<sup>2</sup>)

#### Database ecoinvent

013<sub>Kon</sub> 31.4

Calculated by HFA

## Details of sustainability rating

### Database ecoinvent

Lifecycle (Phases)	GWP [kg CO <sub>2</sub> -e.]	AP [kg SO <sub>2</sub> -e.]	EP [kg PO <sub>4</sub> -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.147	0.052	2.41E-6	0.054	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	91.287	492.568	583.855	419.188	10.862	430.050