
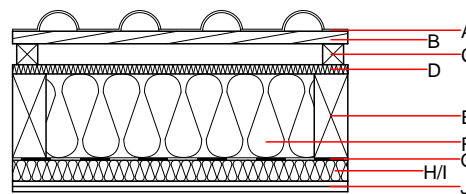


Pitched roof - sdrhzi03b-05

pitched roof, timber frame construction, ventilated, with dry lining, not suspended, other surface

Performance rating

| | | |
|--|-------------------------------------|--|
| Fire protection performance | REI | 60 |
| maximum span = 5 m; maximum load $E_{d,fi} = 3,66 \text{ kN/m}^2$ Classified by HFA | | |
| Thermal performance | U Diffusion | 0.17 $\text{W}/(\text{m}^2\text{K})$ suitable |
| Calculated by HFA | | |
| Acoustic performance | $R_w (C;C_{tr})$ $L_{n,w} (C_i)$ | 53(-3;-9) dB |
| with a tiled roof $R_w = 51 (-3; -9)$ dB Assessed by TGM | | |
| Mass per unit area | m | 47.90 kg/m^2 |
| Calculation based on gypsum plaster board type DF | | |

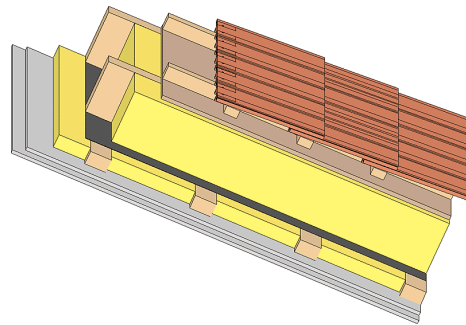

Note: The design of the under-roof construction and of the counter-battens have to be specified according to the roof pitch and the national requirements.

Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

| Layer | Thickness | Building material | Thermal performance | | | | Reaction to fire EN |
|-------|-----------|--|---------------------|-----------------|--------|-------|---------------------|
| | | | λ | μ min – max | ρ | c | |
| A | | concrete roof tile or tiled roof | | | 2100 | | A1 |
| B | 30.0 | spruce wood battens (30/50) | 0.120 | 50 | 450 | 1.600 | D |
| C | 50.0 | spruce wood counter battens (minimum height 50 mm) | 0.120 | 50 | 450 | 1.600 | D |
| D | 22.0 | softboard [045; 250] - rigid underlay | 0.045 | 5 | 250 | 2.100 | E |
| E | 200.0 | construction timber (80/.; e=800) | 0.120 | 50 | 450 | 1.600 | D |
| F | 200.0 | mineral wool [038; ≥ 33 ; $\geq 1000^\circ\text{C}$] | 0.038 | 1 | 33 | 1.030 | A1 |
| G | | vapour barrier $s_d \geq 1 \text{ m}$ | | | 1000 | | |
| H | 50.0 | spruce wood cross battens (50/80;a=400) | 0.120 | 50 | 450 | 1.600 | D |
| I | 50.0 | mineral wool [038; ≥ 33 ; $\geq 1000^\circ\text{C}$] | 0.038 | 1 | 33 | 1.030 | A1 |
| J | 25.0 | gypsum plaster board type DF (2x12,5 mm) or | 0.250 | 10 | 800 | 1.050 | A2 |
| J | 25.0 | gypsum fibre board (2x12,5 mm) | 0.320 | 21 | 1000 | 1.100 | A2 |

Sustainability rating (per m^2)

Database ecoinvent

$OI3_{kon}$ 38.3

Calculated by HFA

Details of sustainability rating

Database ecoinvent

| Lifecycle (Phases) | GWP [kg CO ₂ -e.] | AP [kg SO ₂ -e.] | EP [kg PO ₄ -e.] | ODP [kg R11-e.] | POCP [kg Ethen-e.] | |
|-----------------------|---------------------------------|--------------------------------|--------------------------------|--------------------|-----------------------|--|
| A1 - A3 | | 0.169 | 0.058 | 2,66E-6 | 0.060 | |

| Lifecycle (Phases) | PERE [MJ] | PERM [MJ] | PERT [MJ] | PENRE [MJ] | PENRM [MJ] | PENRT [MJ] |
|-----------------------|--------------|--------------|--------------|---------------|---------------|---------------|
| A1 - A3 | 76.462 | 418.991 | 495.452 | 481.135 | 12.980 | 494.115 |