

Pitched roof - sdrhzi04a-07

pitched roof, timber frame construction, ventilated, with dry lining, not suspended, other surface

Performance rating

Fire protection performance REI 30

maximum span = 5 m; maximum load $E_{d,fi} = 2,62 \text{ kN/m}^2$ (rafter 60/200 without roofing, counter battens and battens)

Classified by HFA
 Classified by HFA

Germany

F30

Load $E_{d,fi}$ according to the German certification document

Corresponding proof: DIN 4102-4:2016-05, Tabelle 10.19, Zeile 1

Thermal performance U Diffusion 0.19 $\text{W}/(\text{m}^2\text{K})$ suitable



Calculated by TUM

Acoustic performance $R_w (C; C_{tr})$ 53(-2;-8) dB
 $L_{n,w} (C_i)$

Assessed by Müller-BBM

Mass per unit area m 102.10 kg/m^2

Calculation based on gypsum plaster board type DF

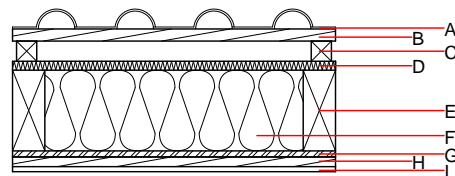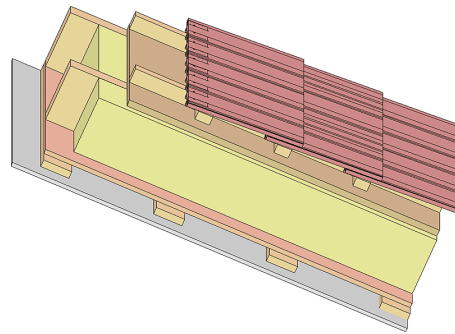

Note: The design of the under-roof construction and of the counter-battens have to be specified according to the roof pitch and the national requirements.

Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

	Thickness	Building material	Thermal performance				Reaction to fire EN
			λ	μ min – max	ρ	c	
A		concrete roof tile or tiled roof			2100		A1
B	30.0	spruce wood battens (30/50)	0.120	50	450	1.600	D
C	50.0	spruce wood counter battens (Austria: minimum height 50 mm), Germany 30 mm	0.120	50	450	1.600	D
D	22.0	softboard [045; 250] - rigid underlay	0.045	5	250	2.100	E
E	200.0	construction timber (80/..; e=625)	0.120	50	450	1.600	D
F	200.0	Wood fibre insulation [039; 45]	0.039	1 - 2	45	2.100	E
G	15.0	OSB (sealed with airtight tape)	0.130	200	600	1.700	D
H	24.0	spruce wood cladding with spacing of cladding boards(24/100); a=400	0.120	50	450	1.600	D
I	12.5	gypsum plaster board type DF or	0.250	10	800	1.050	A2
I	12.5	gypsum fibre board	0.320	21	1000	1.100	A2

Sustainability rating (per m^2)

Database ecoinvent

$OI3_{kon}$ 23.7

Calculated by HFA

Database GaBi (ÖKOBAUDAT)

Built-in renewable materials	kg	43.250
Biogenic carbon in $\text{kg CO}_2\text{-e}$.	kg CO_2	63.520
Energy use of Primary Energy	MJ	1192.800
Share of renewable PE	%	30.90

Calculated by TUM

Details of sustainability rating

Database ecoinvent

Lifecycle (Phases)	GWP [kg CO ₂ -e.]	AP [kg SO ₂ -e.]	EP [kg PO ₄ -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.106	0.048	2,65E-6	0.022	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	106.167	670.525	776.692	429.361	33.304	462.666

Database GaBi (ÖKOBAUDAT)

Lifecycle (Phases)	GWP [kg CO ₂ -e.]	AP [kg SO ₂ -e.]	EP [kg PO ₄ -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.118	0.024	7,18E-7	0.030	
C1 - C4		0.007	0.001	7,05E-8	0.001	
A1 - C4		0.128	0.025	7,96E-7	0.030	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	364.347	995.754	1361.173	775.644	42.132	817.900
C1 - C4	3.174	-990.584	-987.410	34.194	-41.190	-6.996
A1 - C4	368.598	5.429	375.099	824.202	0.994	825.319