

### Pitched roof - sdrhzi06a-03

pitched roof, timber frame construction, ventilated, with dry lining, not suspended, other surface

#### Performance rating

**Fire protection performance** REI 30

maximum span = 5 m; maximum load  $E_{d,fi} = 2,62 \text{ kN/m}^2$   
 Classified by HFA

**Thermal performance** U Diffusion 0.15  $\text{W}/(\text{m}^2\text{K})$   
 suitable



Calculated by HFA

**Acoustic performance**  $R_w (C;C_{tr})$  53(-2;-8) dB  
 $L_{n,w} (C_i)$

with a tiled roof  $R_w = 52 \text{ dB}$   
 Assessed by TGM

**Mass per unit area** m 53.10  $\text{kg}/\text{m}^2$

Calculation based on gypsum plaster board type DF

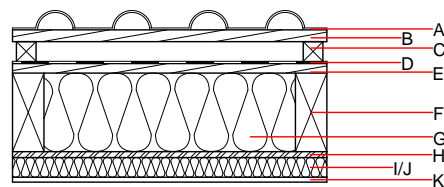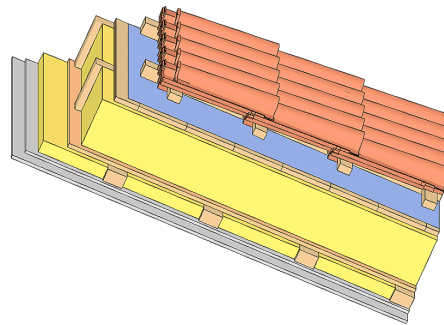

**Note:** The design of the under-roof construction and of the counter-battens have to be specified according to the roof pitch and the national requirements.

#### Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

Layer	Thickness	Building material	Thermal performance				Reaction to fire EN
			$\lambda$	$\mu \text{ min} - \text{max}$	$\rho$	c	
A		concrete roof tile or tiled roof				2100	A1
B	30.0	spruce wood battens (30/50)	0.120	50	450	1.600	D
C	50.0	spruce wood counter battens (minimum height 50 mm)	0.120	50	450	1.600	D
D		sarking membrane $s_d \leq 0,3\text{m}$				1000	E
E	24.0	planking spruce wood closed cladding without spacing of cladding boards	0.120	50	450	1.600	D
F	240.0	construction timber (80/..; e=800)	0.120	50	450	1.600	D
G	240.0	mineral wool [040; $\geq 16$ ; $< 1000^\circ\text{C}$ ]	0.040	1	16	1.030	A1
H	15.0	OSB (sealed with airtight tape)	0.130	200	600	1.700	D
I	50.0	spruce wood cross battens (50/80;a=400)	0.120	50	450	1.600	D
J	50.0	mineral wool [040; $\geq 16$ ; $< 1000^\circ\text{C}$ ]	0.040	1	16	1.030	A1
K	12.5	gypsum plaster board type DF or	0.250	10	800	1.050	A2
K	12.5	gypsum fibre board	0.320	21	1000	1.100	A2

#### Sustainability rating (per $\text{m}^2$ )

##### Database ecoinvent

$OI3_{kon}$  31.3

Calculated by HFA

**Details of sustainability rating**

Database ecoinvent

Lifecycle (Phases)	GWP [kg CO <sub>2</sub> -e.]	AP [kg SO <sub>2</sub> -e.]	EP [kg PO <sub>4</sub> -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.147	0.067	3,20E-6	0.030	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	131.586	704.594	836.180	509.089	17.244	526.333