

### Pitched roof - sdrhzi08a-01

pitched roof, timber frame construction, ventilated, with dry lining, not suspended, other surface

#### Performance rating

**Fire protection performance** REI 30

maximum span = 5 m; maximum load  $E_{d,fi} = 3,66 \text{ kN/m}^2$   
 Classified by HFA

**Thermal performance** U Diffusion 0.21  $\text{W}/(\text{m}^2\text{K})$   
 suitable



Calculated by HFA

**Acoustic performance**  $R_w (C;C_{tr})$  49(-4;-10) dB  
 $L_{n,w} (C_i)$

with a tiled roof  $R_w = 47 (-4; -10) \text{ dB}$   
 Assessed by TGM

**Mass per unit area** m 37.00  $\text{kg}/\text{m}^2$

Calculation based on gypsum plaster board type DF

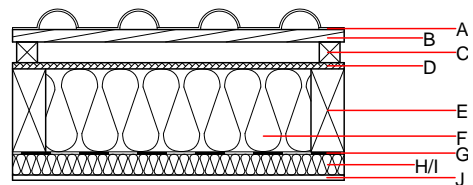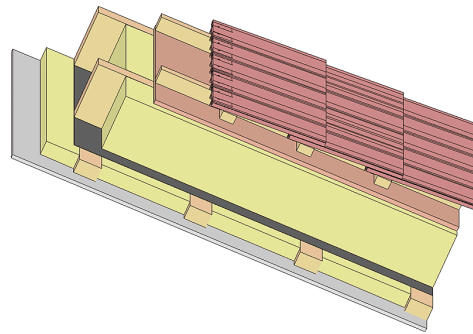

**Note:** The design of the under-roof construction and of the counter-battens have to be specified according to the roof pitch and the national requirements.  
 I=without insulation

#### Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

Layer	Thickness	Building material	Thermal performance				Reaction to fire EN	
			$\lambda$	$\mu \text{ min} - \text{max}$	$\rho$	c		
A		concrete roof tile or tiled roof				2100	A1	
B	30.0	spruce wood battens (30/50)	0.120	50	450	1.600	D	
C	50.0	spruce wood counter battens (minimum height 50 mm)	0.120	50	450	1.600	D	
D	15.0	fibreboard (MDF)	0.140	11	600	1.700	D	
E	200.0	construction timber (80/...; e=800)	0.120	50	450	1.600	D	
F	200.0	mineral wool [040; $\geq 16$ ; $< 1000^\circ\text{C}$ ]	0.040	1		16	1.030	A1
G		vapour barrier $s_d \geq 1 \text{ m}$				1000		
H	50.0	spruce wood cross battens (50/80;a=400)	0.120	50	450	1.600	D	
I		air layer	0.000	1		1	1.008	
J	12.5	gypsum plaster board type DF or	0.250	10	800	1.050	A2	
J	12.5	gypsum fibre board	0.320	21	1000	1.100	A2	

#### Sustainability rating (per $\text{m}^2$ )

##### Database ecoinvent

$OI3_{kon}$  28.0

Calculated by HFA

**Details of sustainability rating**

Database ecoinvent

Lifecycle (Phases)	GWP [kg CO <sub>2</sub> -e.]	AP [kg SO <sub>2</sub> -e.]	EP [kg PO <sub>4</sub> -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.114	0.051	2,44E-6	0.021	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	78.172	475.925	554.097	422.656	46.624	469.280