

Pitched roof - sdrhzi09a-05

pitched roof, timber frame construction, ventilated, with dry lining, not suspended, other surface

Performance rating

Fire protection performance REI 30

maximum span = 5 m; maximum load $E_{d,fi} = 2,62 \text{ kN/m}^2$ (rafter 60/200 without roofing, counter battens and battens)

Classified by IBS
 Classified by HFA

Germany

F30

Load $E_{d,fi}$ according to the German certification document

Corresponding proof: DIN 4102-4:2016-05, Tabelle 10.19, Zeile 1

Thermal performance U Diffusion 0.20 $\text{W}/(\text{m}^2\text{K})$ suitable



Calculated by HFA
 Calculated by TUM

Acoustic performance $R_w (C; C_{tr})$ $L_{n,w} (C_i)$ 53(-2;-8) dB

with a tiled roof $R_w = 51 (-2; -8)$ dB
 Assessed by TGM
 Assessed by Müller-BBM

Mass per unit area m 107.10 kg/m^2

Calculation based on gypsum plaster board type DF

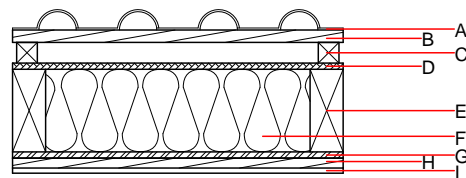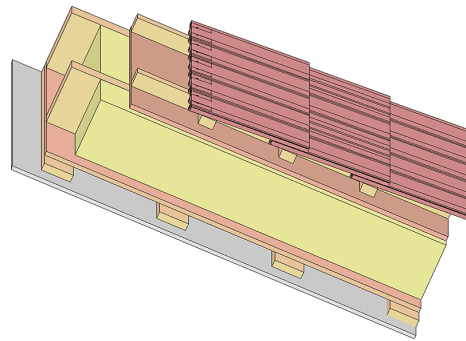

Note: The design of the under-roof construction and of the counter-battens have to be specified according to the roof pitch and the national requirements.

Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

	Thickness	Building material	Thermal performance				Reaction to fire EN
			λ	μ min – max	ρ	c	
A		concrete roof tile or tiled roof				2100	A1
B	30.0	spruce wood battens (30/50)	0.120	50	450	1.600	D
C	50.0	spruce wood counter battens (Austria: minimum height 50 mm), Germany 30 mm	0.120	50	450	1.600	D
D	16.0	fibreboard (MDF)	0.140	11	600	1.700	D
E	200.0	construction timber (80/..; e=625)	0.120	50	450	1.600	D
F	200.0	Cellulose fibre [040; 50]	0.040	1	50	2.000	E
G	15.0	OSB (sealed with airtight tape)	0.130	200	600	1.700	D
H	24.0	spruce wood cladding with spacing of cladding boards(24/100); a=400	0.120	50	450	1.600	D
I	12.5	gypsum plaster board type DF or	0.250	10	800	1.050	A2
I	12.5	gypsum fibre board	0.320	21	1000	1.100	A2

Sustainability rating (per m²)

Database ecoinvent

O13 _{Kon}	21.8
Calculated by HFA	

Database GaBi (ÖKOBAUDAT)

Built-in renewable materials	kg	51.740
Biogenic carbon in kg CO ₂ -e.	kg CO ₂	72.780
Energy use of Primary Energy	MJ	832.090
Share of renewable PE	%	23.84
Calculated by TUM		

Details of sustainability rating

Database ecoinvent

Lifecycle (Phases)	GWP [kg CO ₂ -e.]	AP [kg SO ₂ -e.]	EP [kg PO ₄ -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.111	0.048	2,29E-6	0.020	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	105.360	700.414	805.775	377.912	30.095	408.007

Database GaBi (ÖKOBAUDAT)

Lifecycle (Phases)	GWP [kg CO ₂ -e.]	AP [kg SO ₂ -e.]	EP [kg PO ₄ -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.087	0.017	1,53E-6	0.024	
C1 - C4		0.010	0.007	1,08E-7	0.001	
A1 - C4		0.100	0.025	1,64E-6	0.024	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	195.195	825.882	1022.508	594.125	23.395	617.644
C1 - C4	2.084	-677.546	-675.463	25.249	-22.453	2.796
A1 - C4	198.355	148.595	348.380	633.737	0.994	634.855