

Pitched roof - sdrhzo03a-00

pitched roof, timber frame construction, ventilated, without dry lining, directly, wooden surface



Performance rating

Fire protection performance REI 30
 maximum span = 5 m; maximum load $E_{d,fi} = 4,5 \text{ kN/m}^2$
 Classified by HFA

Thermal performance U Diffusion 0.19 $\text{W}/(\text{m}^2\text{K})$ suitable
 Calculated by HFA

Acoustic performance $R_w (C;C_{tr})$ 47(-3;-10) dB
 $L_{n,w} (C_i)$
 Assessed by TGM

Mass per unit area m 81.80 kg/m^2

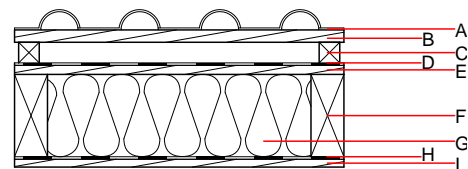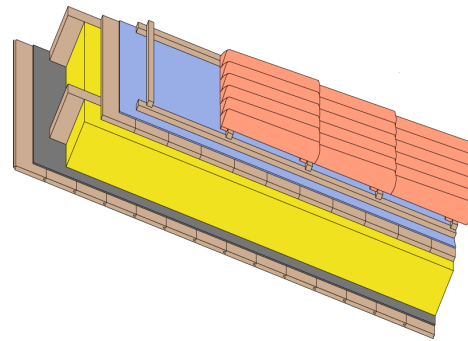

Note: The design of the under-roof construction and of the counter-battens have to be specified according to the roof pitch and the national requirements.

Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

Layer	Thickness	Building material	Thermal performance				Reaction to fire EN
			λ	$\mu \text{ min - max}$	ρ	c	
A		concrete roof tile or tiled roof			2100		A1
B	30.0	spruce wood battens (30/50)	0.120	50	450	1.600	D
C	50.0	spruce wood counter battens (minimum height 50 mm)	0.120	50	450	1.600	D
D		sarking membrane $s_d \leq 0,3\text{m}$			1000		E
E	22.0	planking spruce wood full formwork	0.120	50	450	1.600	D
F	220.0	construction timber (80/.; e=800)	0.120	50	450	1.600	D
G	220.0	mineral wool [038; ≥ 33 ; $\geq 1000^\circ\text{C}$]	0.038	1	33	1.030	A1
H		vapour barrier $s_d \geq 11\text{m}$			1000		
I	19.0	planking profile C	0.120	50	450	1.600	

Sustainability rating (per m^2)

Database ecoinvent

$OI3_{kon}$ 29.1

Calculated by HFA

Details of sustainability rating

Database ecoinvent

Lifecycle (Phases)	GWP [kg CO ₂ -e.]	AP [kg SO ₂ -e.]	EP [kg PO ₄ -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.153	0.053	2,04E-6	0.060	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	108.226	599.025	707.251	383.124	10.862	393.987