


## Compartment wall - twrxo03a-03

compartment wall, timber frame construction, without dry lining, double-layer, other surface

### Performance rating

<b>Fire protection performance</b>	REI	45
apply to each of the load bearing walls; the whole wall: EI90; maximum ceiling height = 3 m; maximum load $E_{d,fi} = 19,2 \text{ kN/m}$ Classified by HFA		
<b>Thermal performance</b>	U Diffusion	0.19 $\text{W}/(\text{m}^2\text{K})$ suitable
Calculated by HFA		
<b>Acoustic performance</b>	$R_w$ ( $C; C_{tr}$ ) $L_{n,w}$ ( $C_i$ )	58(-3; 11) dB
Assessed by MA39		
<b>Mass per unit area</b>	m	83.50 $\text{kg}/\text{m}^2$
Calculation based on gypsum plaster board type DF		

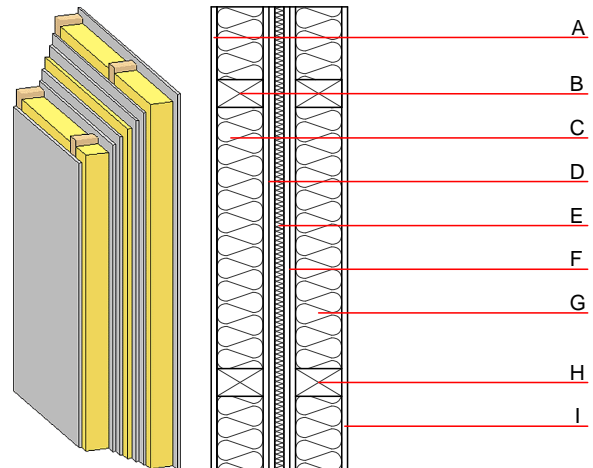

Note: e=625

### Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

	Thickness	Building material	Thermal performance				Reaction to fire EN
			$\lambda$	$\mu$ min - max	$\rho$	c	
A	12.5	gypsum plaster board type DF or	0.250	10	800	1.050	A2
A	12.5	gypsum fibre board	0.320	21	1000	1.100	A2
B	100.0	construction timber (60/100; e=*)	0.120	50	450	1.600	D
C	100.0	cellulose fibre [0,040; R=55]	0.040	1 - 2	55	2.000	B
D	25.0	gypsum plaster board type DF (2x12,5 mm) or	0.250	10	800	1.050	A2
D	25.0	gypsum fibre board (2x12,5 mm)	0.320	21	1000	1.100	A2
E	20.0	mineral wool [040; $\geq 16$ ; $< 1000^\circ\text{C}$ ]	0.040	1	16	1.030	A1
F	25.0	gypsum plaster board type DF (2x12,5 mm) or	0.250	10	800	1.050	A2
F	25.0	gypsum fibre board (2x12,5 mm)	0.320	21	1000	1.100	A2
G	100.0	construction timber (60/100; e=*)	0.120	50	450	1.600	D
H	100.0	cellulose fibre [0,040; R=55]	0.040	1 - 2	55	2.000	B
I	12.5	gypsum plaster board type DF or	0.250	10	800	1.050	A2
I	12.5	gypsum fibre board	0.320	21	1000	1.100	A2

### Sustainability rating (per $\text{m}^2$ )

#### Database ecoinvent

$\text{O13}_{\text{Kon}}$  21.4

Calculated by HFA

**Details of sustainability rating**

Database ecoinvent

Lifecycle (Phases)	GWP [kg CO <sub>2</sub> -e.]	AP [kg SO <sub>2</sub> -e.]	EP [kg PO <sub>4</sub> -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.081	0.036	2,30E-6	0.012	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	51.372	258.600	309.972	343.482	0.000	343.482