


Compartment wall - twrxxo03b-05

compartment wall, timber frame construction, without dry lining, double-layer, other surface

Performance rating

Fire protection performance	REI	60
apply to each individual load-bearing wall; the whole wall: EI90; maximum ceiling height = 3 m; maximum load $E_{d,fi}$ = 50,0 kN/m Classified by MA39 Classified by HFA		
Thermal performance	U Diffusion	0.20 W/(m ² K) suitable
Calculated by HFA		
Acoustic performance	R_w (C;C _{tr}) $L_{n,w}$ (C _i)	59(-2;-10) dB
Assessed by MA39		
Mass per unit area	m	98.00 kg/m ²
Calculation based on gypsum plaster board type DF		

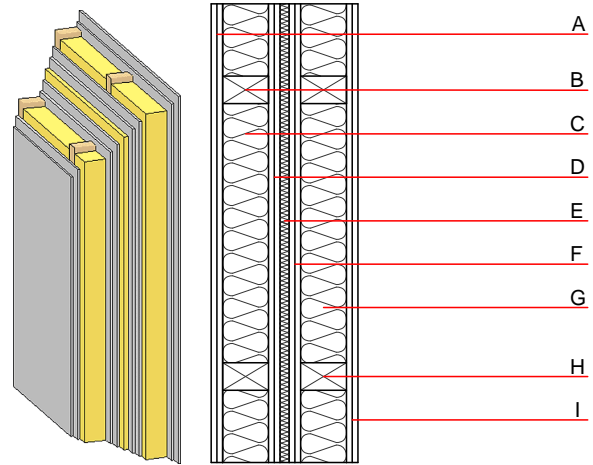

Note: layer A, D, F, I: planking 2x12,5mm; e=400

Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

	Thickness	Building material	Thermal performance				Reaction to fire EN
			λ	μ min – max	ρ	c	
A	25.0	gypsum plaster board type DF or	0.250	10	800	1.050	A2
A	25.0	gypsum fibre board	0.320	21	1000	1.100	A2
B	100.0	construction timber (60/100; e=*)	0.120	50	450	1.600	D
C	100.0	mineral wool [040; ≥ 16 ; <1000°C]	0.040	1	16	1.030	A1
D	25.0	gypsum plaster board type DF or	0.250	10	800	1.050	A2
D	25.0	gypsum fibre board	0.320	21	1000	1.100	A2
E	20.0	mineral wool [040; ≥ 16 ; <1000°C]	0.040	1	16	1.030	A1
F	25.0	gypsum plaster board type DF or	0.250	10	800	1.050	A2
F	25.0	gypsum fibre board	0.320	21	1000	1.100	A2
G	100.0	construction timber (60/100; e=*)	0.120	50	450	1.600	D
H	100.0	mineral wool [040; ≥ 16 ; <1000°C]	0.040	1	16	1.030	A1
I	25.0	gypsum plaster board type DF or	0.250	10	800	1.050	A2
I	25.0	gypsum fibre board	0.320	21	1000	1.100	A2

Sustainability rating (per m²)

Database ecoinvent

O13_{Kon} 32.7

Calculated by HFA

Details of sustainability rating

Database ecoinvent

Lifecycle (Phases)	GWP [kg CO ₂ -e.]	AP [kg SO ₂ -e.]	EP [kg PO ₄ -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.112	0.053	3,34E-6	0.018	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	67.386	245.670	313.056	514.097	0.000	514.097