dataholz.eu

Designation: twrxxo07b-04
Last updated: 8/2/23
Source: Holzforschung Austria
Editor: HFA, SP

Compartment wall - twrxxo07b-04

compartment wall, timber frame construction, without dry lining, double-layer, gypsum plasterboard

Performance rating

Fire protection performance	**REI**	90

apply to each individual load-bearing wall; the whole wall: EI90; maximum ceiling height = 3 m; maximum load $E_{d,fi}$ = 19,0 kN/m
Classified by HFA

Thermal performance	**U**	0.19 W/(m²K)
	Diffusion	suitable

Calculated by HFA

Acoustic performance	**R_w ($C;C_{tr}$)**	60(-3;-10) dB
	$L_{n,w}$ (C_I)	

Assessed by MA39

Mass per unit area	**m**	111.80 kg/m²

Calculation based on gypsum plaster board type DF

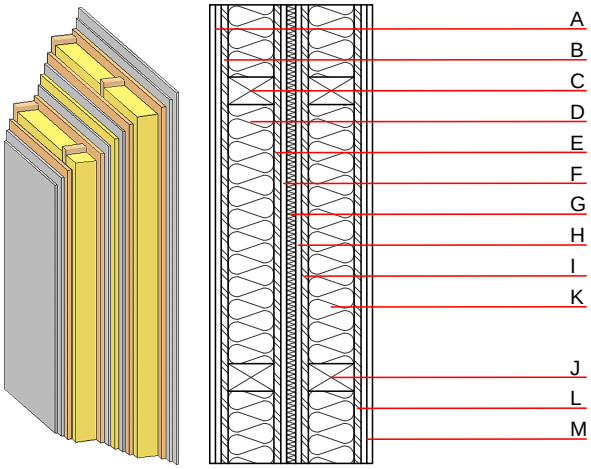

Note: e=625

Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

	Thickness	Building material	Thermal performance				Reaction to fire
			λ	μ min – max	ρ	c	EN
A	25.0	gypsum plaster board type DF (2x12,5 mm) or	0.250	10	800	1.050	A2
A	25.0	gypsum fibre board (2x12,5 mm)	0.320	21	1000	1.100	A2
B	15.0	OSB	0.130	200	600	1.700	D
C	100.0	construction timber (60/100; e=*)	0.120	50	450	1.600	D
D	100.0	sheep wool [0,041; R=26]	0.041	1	30	1.720	E
E	15.0	OSB	0.130	200	600	1.700	D
F	12.5	gypsum plaster board type DF or	0.250	10	800	1.050	A2
F	12.5	gypsum fibre board	0.320	21	1000	1.100	A2
G	20.0	mineral wool [040; ≥16; <1000°C]	0.040	1	16	1.030	A1
H	12.5	gypsum plaster board type DF or	0.250	10	800	1.050	A2
H	12.5	gypsum fibre board	0.320	21	1000	1.100	A2
I	15.0	OSB	0.130	200	600	1.700	D
J	100.0	construction timber (60/100; e=*)	0.120	50	450	1.600	D
K	100.0	sheep wool [0,041; R=26]	0.041	1	30	1.720	E
L	15.0	OSB	0.130	200	600	1.700	D
M	25.0	gypsum plaster board type DF (2x12,5 mm) or	0.250	10	800	1.050	A2
M	25.0	gypsum fibre board (2x12,5 mm)	0.320	21	1000	1.100	A2

Sustainability rating (per m²)

Database ecoinvent

$OI3_{Kon}$	33.2

Calculated by HFA

Details of sustainability rating

Database ecoinvent

Lifecycle (Phases)	GWP [kg CO_2-e.]	AP [kg SO_2-e.]	EP [kg PO_4-e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.136	0.058	3,60E-6	0.027	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	157.174	809.876	967.051	606.032	44.015	650.046