

External wall - awrhh05a-06

external wall, timber frame construction, ventilated, without dry lining, with cladding, other surface

Performance rating

Fire protection performance	REI from inside	30
	REI from outside	30

maximum ceiling height = 3 m; maximum load $E_{d,fi}$ = 32,0 kN/m
 Classified by MA39
 Classified by HFA

Thermal performance	U	0.27 W/(m ² K)
	Diffusion	suitable


Calculated by HFA

Acoustic performance	R_w (C;C _{tr})	45(-2;-8) dB
	$L_{n,w}$ (C _i)	

Battens for the ventilation space screwed onto the structural timber result in an $R_w(C;C_{tr})=41(-1;-7)$ dB
 Assessed by MA39

Mass per unit area	m	34.70 kg/m ²
--------------------	---	-------------------------

Calculation based on GF

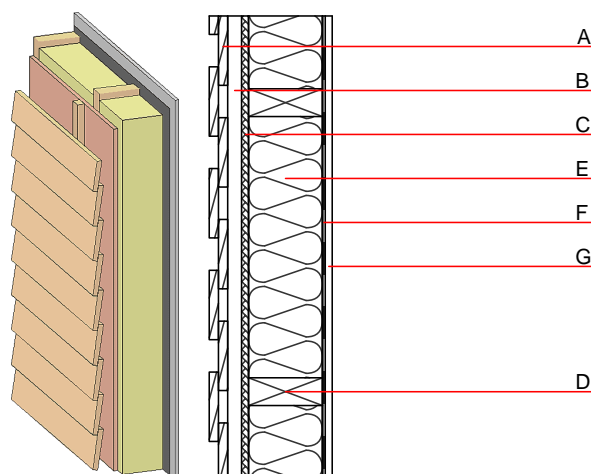

Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

	Thickness	Building material	Thermal performance				Reaction to fire	
			λ	μ min – max	ρ	c	EN	
A	24.0	larch wood external wall cladding	0.155	150	600	1.600	D	
B	30.0	spruce wood battens offset (30/50; 30/80) - ventilation	0.120	50	450	1.600	D	
C	15.0	fibreboard (MDF)	0.140	11	600	1.700	D	
D	160.0	construction timber (60/...; e=625)	0.120	50	450	1.600	D	
E	160.0	Cellulose fibre [040; 50]	0.040	1	50	2.000	E	
F		vapour barrier sd \geq 1m				1000		
G	15.0	gypsum fibre board or	0.320	21	1000	1.100	A2	
G	15.0	gypsum plaster board type DF	0.250	10	800	1.050	A2	

Sustainability rating (per m²)

Database ecoinvent

OI3 _{Kon}	13.5
--------------------	------

Calculated by HFA

Details of sustainability rating

Database ecoinvent

Lifecycle (Phases)	GWP [kg CO ₂ -e.]	AP [kg SO ₂ -e.]	EP [kg PO ₄ -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.082	0.035	1,28E-6	0.016	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	100.491	590.894	691.386	257.651	22.510	280.161