

**External wall - awrohi01a-05**

external wall, timber frame construction, not ventilated, with dry lining, with cladding, other surface

**Performance rating**

**Fire protection performance** REI from inside 60  
 REI from outside 30  
 maximum ceiling height = 3 m; maximum load  $E_{d,fi} = 19,2 \text{ kN/m}$   
 Classified by HFA

**Thermal performance** U 0.13  $\text{W}/(\text{m}^2\text{K})$   
 Diffusion suitable


Calculated by HFA

**Acoustic performance**  $R_w (C;C_{tr})$  55(-3;-9) dB  
 $L_{n,w} (C_i)$

battens for the dry lining mounted offset without using resilient clips will result in  $R_w(C;C_{tr})=52(-2;-7)$  dB  
 Assessed by MA39

**Mass per unit area** m 76.10  $\text{kg}/\text{m}^2$

Calculation based on GF

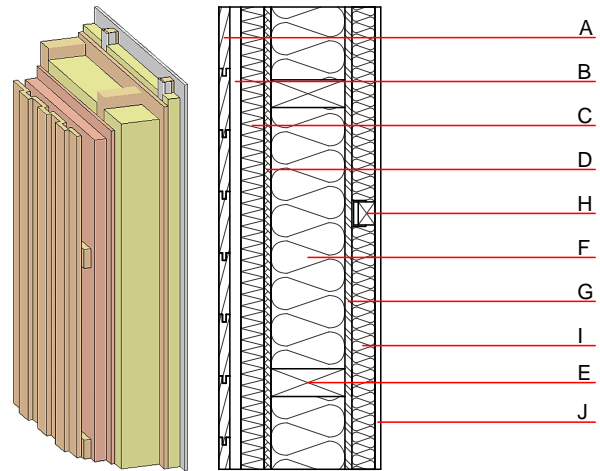

Note: e=625

**Register of building materials used for this application, cross-section** (from outside to inside, dimensions in mm)

	Thickness	Building material	Thermal performance				Reaction to fire EN
			$\lambda$	$\mu$ min - max	$\rho$	c	
A	24.0	larch wood external wall cladding	0.155	150	600	1.600	D
B	24.0	spruce wood cross battens	0.120	50	450	1.600	D
C	50.0	wood wool composite boards	0.090	2 - 5	370	2.000	B
D	15.0	fibreboard (MDF)	0.140	11	600	1.700	D
E	200.0	construction timber (60/..; e=*)	0.120	50	450	1.600	D
F	200.0	mineral wool [040; $\geq 16$ ; $< 1000^\circ\text{C}$ ]	0.040	1	16	1.030	A1
G	15.0	OSB (sealed with airtight tape)	0.130	200	600	1.700	D
H	80.0	spruce wood battens offset mounted on resilient clips	0.120	50	450	1.600	D
I	80.0	mineral wool [040; $\geq 16$ ; $< 1000^\circ\text{C}$ ] or air layer in type 02	0.040	1	16	1.030	A1
J	12.5	gypsum fibre board or	0.320	21	1000	1.100	A2
J	12.5	gypsum plaster board type DF	0.250	10	800	1.050	A2

**Sustainability rating** (per  $\text{m}^2$ )

Database ecoinvent

$O13_{kon}$  32.7

Calculated by HFA

**Details of sustainability rating**

Database ecoinvent

Lifecycle (Phases)	GWP [kg CO <sub>2</sub> -e.]	AP [kg SO <sub>2</sub> -e.]	EP [kg PO <sub>4</sub> -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.163	0.070	2,88E-6	0.031	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	146.187	869.854	1016.041	550.139	28.891	579.030