

External wall - awropo04a-10

external wall, timber frame construction, not ventilated, without dry lining, with rendering, other surface

Performance rating

Fire protection performance	REI from inside	30
	REI from outside	30
maximum ceiling height = 3 m; maximum load $E_{d,fi} = 19,2 \text{ kN/m}$		
Classified by HFA		

Thermal performance	U	0.20 $\text{W}/(\text{m}^2\text{K})$
	Diffusion	suitable


Calculated by HFA

Acoustic performance	$R_w (C; C_{tr})$	47(-2;-6) dB
	$L_{n,w} (C_i)$	

EPS-F with a dynamic stiffness of $s' = 20\text{MN}/\text{m}^3$.
 Assessed by MA39

Mass per unit area	m	38.90 kg/m^2
---------------------------	---	------------------------------

Calculation based on gypsum plaster board type DF

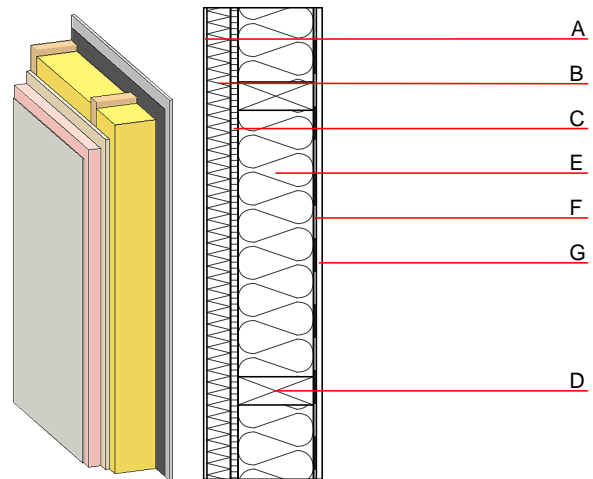

Note: e=625

Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

	Thickness	Building material	Thermal performance				Reaction to fire EN
			λ	μ min - max	ρ	c	
A	4.0	plaster	1.000	10 - 35	2000	1.130	A1
B	50.0	Elasticized polystyrene FS	0.040	20 - 50	17	1.450	E
C	16.0	particleboard P5	0.130	50 - 100	700	1.700	D
D	160.0	construction timber (60/..; e=*)	0.120	50	450	1.600	D
E	160.0	mineral wool [040; ≥ 16 ; $< 1000^\circ\text{C}$]	0.040	1	16	1.030	A1
F		vapour barrier $s_d \geq 20\text{m}$			1000		
G	12.5	gypsum plaster board type DF or	0.250	10	800	1.050	A2
G	12.5	gypsum fibre board	0.320	21	1000	1.100	A2

Sustainability rating (per m^2)

Database ecoinvent

OI3_{Kon}	26.5
---------------------------	------

Calculated by HFA

Details of sustainability rating

Database ecoinvent

Lifecycle (Phases)	GWP [kg CO ₂ -e.]	AP [kg SO ₂ -e.]	EP [kg PO ₄ -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.102	0.042	1,79E-6	0.025	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	50.168	359.903	410.071	389.736	63.366	453.102