
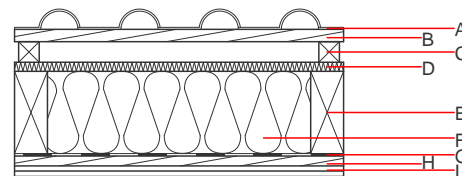


Pitched roof - sdrhzi01 b-01

pitched roof, timber frame construction, ventilated, with dry lining, not suspended, other surface

Performance rating

Fire protection performance	REI	60
maximum span = 5 m; maximum load $E_{d,fi} = 3,66 \text{ kN/m}^2$ Classified by HFA		
Thermal performance	U Diffusion	0.18 $\text{W}/(\text{m}^2\text{K})$ suitable
Calculated by HFA		
Acoustic performance	$R_w (C;C_{tr})$ $L_{n,w} (C_i)$	51 (-3;-9) dB
with a tiled roof $R_w = 49 (-3; -9) \text{ dB}$ Assessed by TGM		
Mass per unit area	m	42.80 kg/m^2
Calculation based on gypsum plaster board type DF		

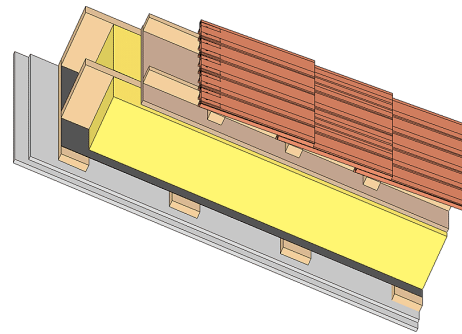

Note: The design of the under-roof construction and of the counter-battens have to be specified according to the roof pitch and the national requirements.

Register of building materials used for this application, cross-section (from outside to inside, dimensions in mm)

	Thickness	Building material	Thermal performance				Reaction to fire EN	
			λ	$\mu \text{ min - max}$	ρ	c		
A		concrete roof tile or tiled roof				2100	A1	
B	30.0	spruce wood battens (30/50)	0.120	50	450	1.600	D	
C	50.0	spruce wood counter battens (minimum height 50 mm)	0.120	50	450	1.600	D	
D	22.0	softboard [045; 250] - rigid underlay	0.045	5	250	2.100	E	
E	220.0	construction timber (80/..; e=800)	0.120	50	450	1.600	D	
F	220.0	mineral wool [040; ≥ 16 ; $< 1000^\circ\text{C}$]	0.040	1		16	1.030	A1
G		vapour barrier $s_d \geq 1 \text{ m}$				1000		
H	24.0	spruce wood cladding with spacing of cladding boards(24/100); a=400	0.120	50	450	1.600	D	
I	25.0	gypsum plaster board type DF (2x12,5 mm) or	0.250	10	800	1.050	A2	
I	25.0	gypsum fibre board (2x12,5 mm)	0.320	21	1000	1.100	A2	

Sustainability rating (per m^2)

Database ecoinvent

$OI3_{kon}$ 29.7

Calculated by HFA

Details of sustainability rating

Database ecoinvent

Lifecycle (Phases)	GWP [kg CO ₂ -e.]	AP [kg SO ₂ -e.]	EP [kg PO ₄ -e.]	ODP [kg R11-e.]	POCP [kg Ethen-e.]	
A1 - A3		0.117	0.054	2,95E-6	0.021	

Lifecycle (Phases)	PERE [MJ]	PERM [MJ]	PERT [MJ]	PENRE [MJ]	PENRM [MJ]	PENRT [MJ]
A1 - A3	74.597	402.613	477.210	453.915	12.980	466.895